

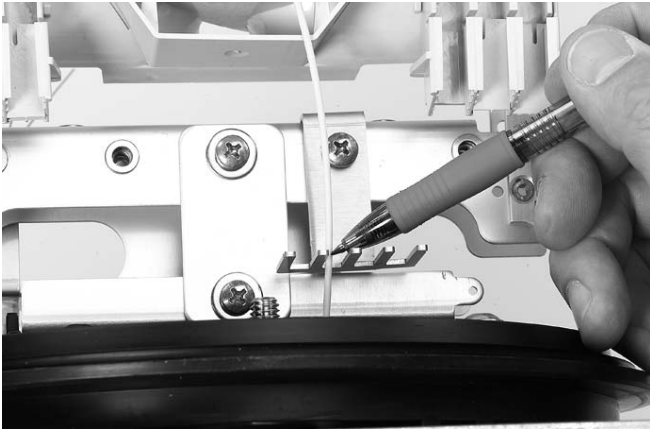
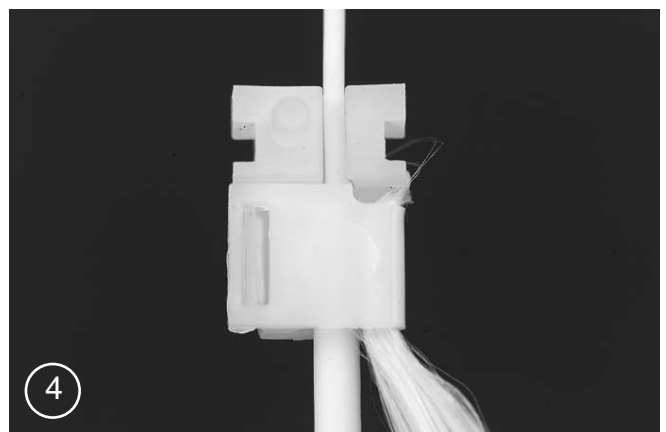
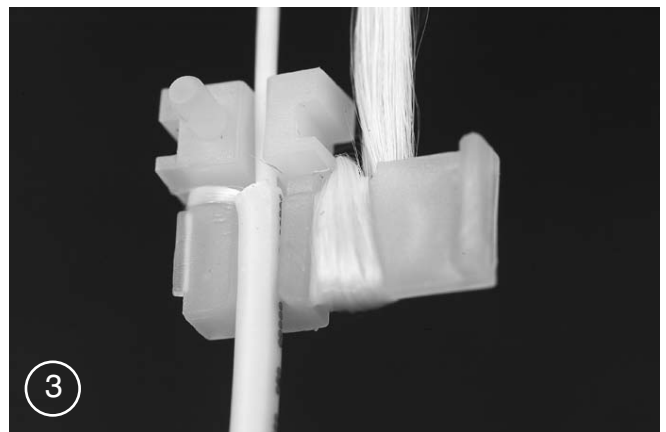


3.4 Feed the drop cable through the port. Respect cable lengths.

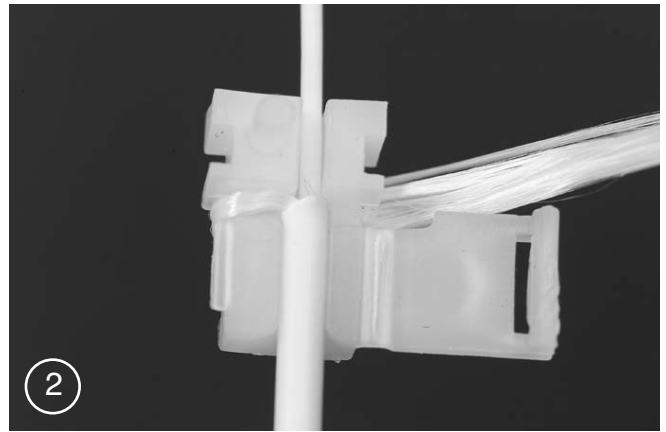

3.5 Mark the drop cable just below the metal bracket and pull a bit further. Remove the outer cable jacket (2.2m) and install mini KTU as shown.



Note: maximum cable diameter to be used in mini KTU is 2.1 mm.

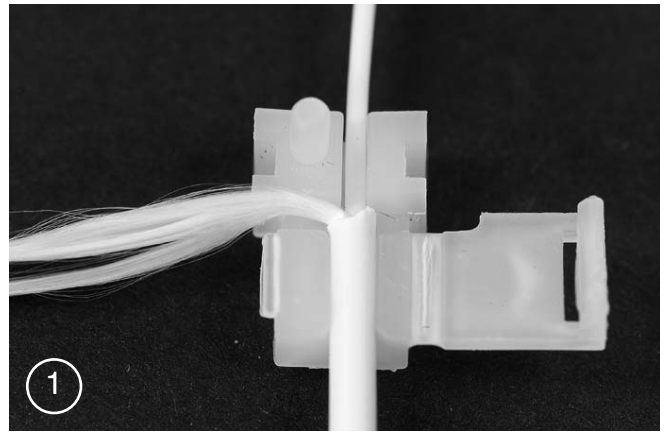


3.6 Place the cable in the groove and route the Kevlar through the left groove (1) and lead behind the back (2) over the hinging part (3) to the front. Wrap 1 x over the hinging part (3) and bring back to the front. Keep the Kevlar under tension and close the hinging part (4). Apply some tension to the Kevlar without pulling at the cable ! Cut away the remaining strands.




3.7 Pull back the cable and install the mini KTU in the holder. Secure with the O-ring.

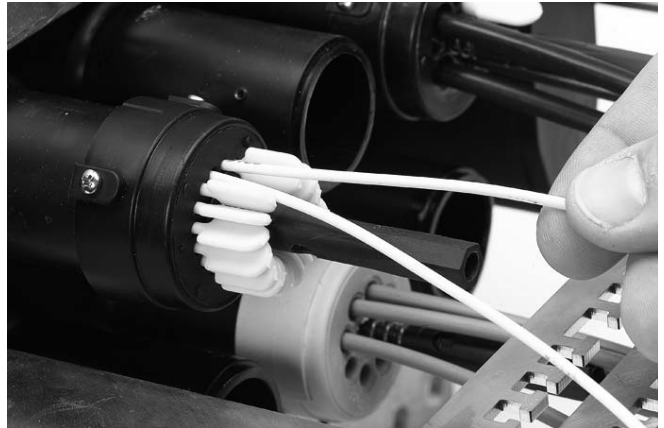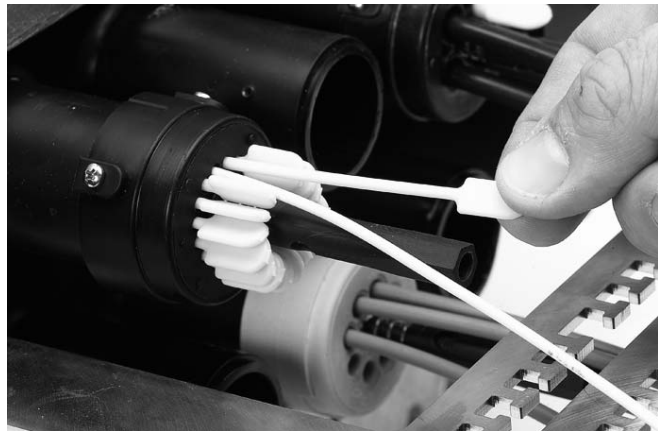

3.10 To add a cable, release the trigger, remove the blind plug and insert the new cable. Proceed as from 3.4.

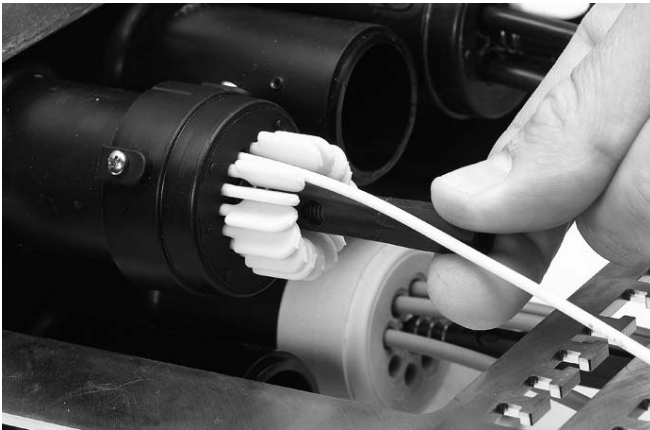

3.8 Tighten the trigger till it butts up with the flange (locking system).

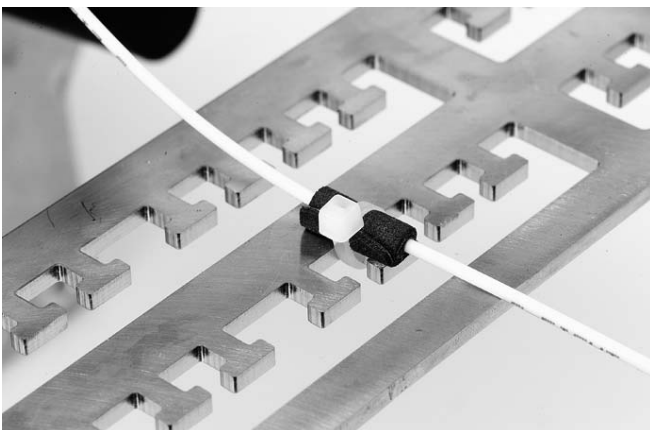

3.9 **Optional:** apply some foam to the cable and secure with tie-wrap to the frame.

Tyco Electronics Raychem NV

Diestsesteenweg 692
B-3010 Kessel-Lo, Belgium
Tel.: 32-16-351 011
Fax: 32-16-351 697
www.tycoelectronics.com
www.telecomosp.com

Tyco Electronics, TE logo and FIST are trademarks. Kevlar is a trademark of E.I. du Pont de Nemours.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, Tyco Electronics makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. Tyco Electronics' obligations shall only be as set forth in Tyco Electronics' Standard Terms and Conditions of Sale for this product and in no case will Tyco Electronics be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of Tyco Electronics products should make their own evaluation to determine the suitability of each such product for the specific application.